

B250016



▶ 主要技术特性 (Main Specifications)

- ▶ 适用导线规格 (Applicable wire) : --
- ▶ 适用基板厚度 (Applicable PC board thickness) : 0.8mm~1.6mm
- ▶ 温度范围 (Temperature range) : -25℃~+85℃
- ▶ 额定电压 (Voltage rating) : 250V AC, DC
- ▶ 额定电流 (Current rating) : 2A AC, DC
- ▶ 接触电阻 (Contact resistance) : $\leq 0.02\Omega$
- ▶ 绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
- ▶ 耐压 (Withstanding voltage) : 1000V AC/minute

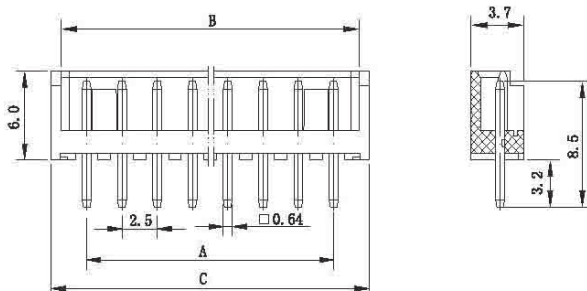
材料及电镀规格 Material and Finish

| 型号 Type | 材料 Material | 材料厚度 Material Thickness | 电镀规格 Finish |
|----------|-------------|-------------------------|---------------|
| 插座 WAFER | 塑胶 HOUSING | PA66 UL94V-0 | N/A |
| | 针PIN | 黄铜 Brass | 镀锡 Tin-plated |

产品尺寸图 Product size chart

 单位: mm 一般公差: ± 0.20

WAFER

B250016-1 6602V25003


WAFER

| 极数 Circuits | 型号 Type | 尺寸 (Dimensions) mm | | | 备注型号 P. S. Type |
|----------------|--------------|--------------------|-------|------|--------------------|
| | | A | B | C | |
| 2 | B250016-1-02 | 2.5 | 6.14 | 7.5 | 6602V25003-A |
| 3 | B250016-1-03 | 5.0 | 8.64 | 10.0 | 6602V25003-B |
| 4 | B250016-1-04 | 7.5 | 11.14 | 12.5 | 6602V25003-C |
| 5 | B250016-1-05 | 10.0 | 13.64 | 15.0 | 6602V25003-D |
| 6 | B250016-1-06 | 12.5 | 16.14 | 17.5 | 6602V25003-E |
| 7 | B250016-1-07 | 15.0 | 18.64 | 20.0 | 6602V25003-F |
| 8 | B250016-1-08 | 17.5 | 21.14 | 22.5 | 6602V25003-G |
| 9 | B250016-1-09 | 20.0 | 23.64 | 25.0 | 6602V25003-H |
| 10 | B250016-1-10 | 22.5 | 26.14 | 27.5 | 6602V25003-I |
| 11 | B250016-1-11 | 25.0 | 28.64 | 30.0 | 6602V25003-J |
| 12 | B250016-1-12 | 27.5 | 31.14 | 32.5 | 6602V25003-K |
| 13 | B250016-1-13 | 30.0 | 33.64 | 35.0 | 6602V25003-L |
| 14 | B250016-1-14 | 32.5 | 36.14 | 37.5 | 6602V25003-M |
| 15 | B250016-1-15 | 35.0 | 38.64 | 40.0 | 6602V25003-N |